




加强型摩托车链条

Heavy duty motorcycle chains

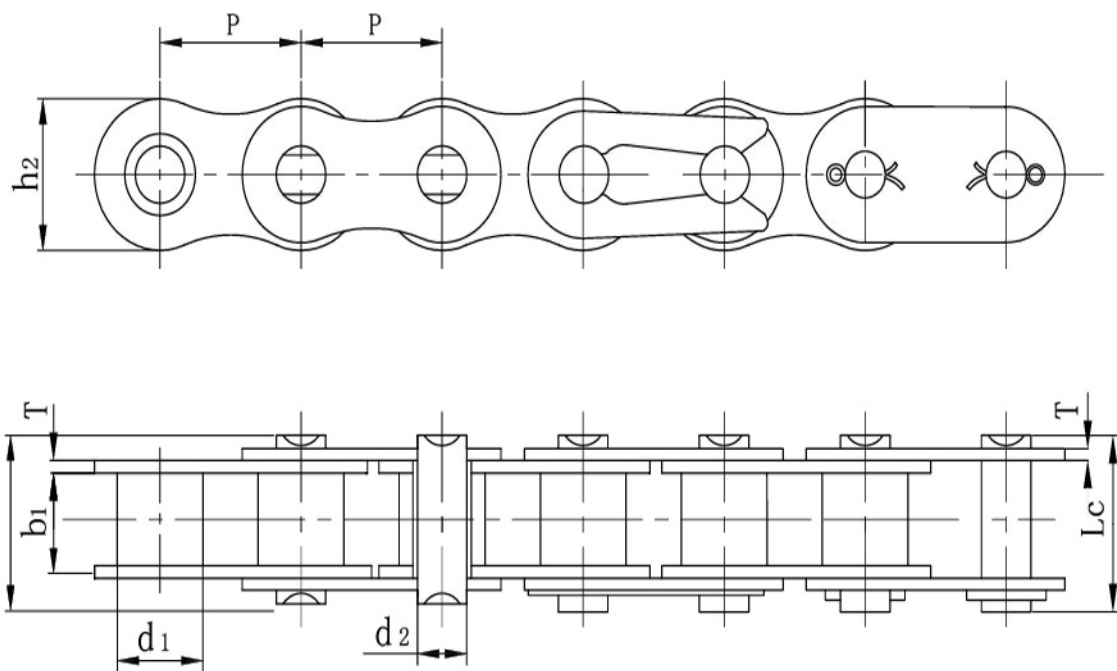

1. 轴销为四方铆头(节距 $\geq 15.875\text{mm}$);
2. 滚子为优质合金钢。

1. Quad-riveted pins(pitch $\geq 15.875\text{mm}$);
2. Superior quality alloy steel for rollers。

钱江链号 Qianjiang Chain No.	节距 Pitch	滚子直径 Roller diameter	外链板厚度 Outer Plate thickness	内链板厚度 inner Plate thickness	内节内宽 Width between inner plates	极限拉伸载荷 Ultimate tensile strength	密封 Seal	适用排量 Disp.C.C.
	P	d1 max	t1 max	t2 max	b1 min	Q(min)	Type	max
	mm	mm	mm	mm	mm	kN		cc
420HZ	12.7	7.77	1.7	1.7	6.25	17.0	-	100
428HZ	12.7	8.51	2.02	2.02	7.94	21.0	-	125
520NZ	15.875	10.22	2.22	2.22	6.25	34.0	-	250
525HZ	15.875	10.22	2.4	2.4	7.94	32.0	-	400
530HZ	15.875	10.22	2.4	2.4	9.4	33.0	-	750
630HT	19.05	11.91	3.2	3.2	9.4	43.0	-	1200