





内接触齿形链 Croch contact chains

内导式
Middle guide

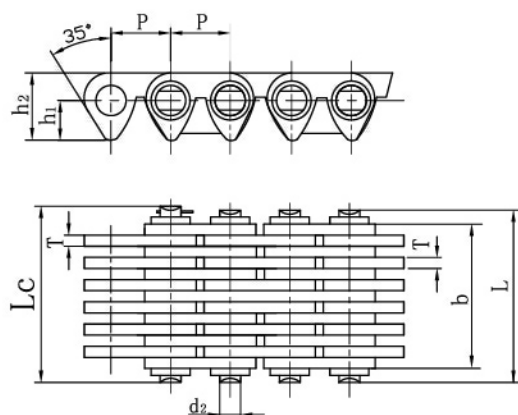

外导式
Side guide

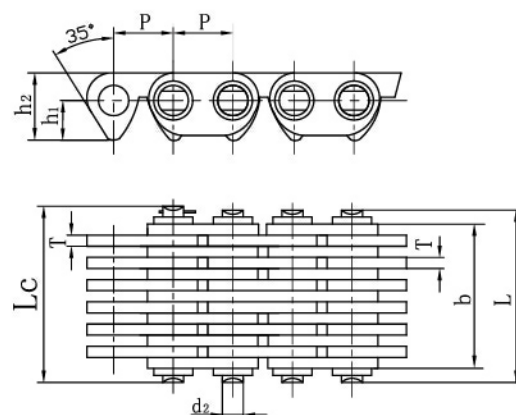

GB 链号 GB Chain No.	节距 Pitch	链宽 Chain width	轴承直径 Pin diameter	销轴长度 Pin length	孔间到齿间距离 Distance from hole centre to tooth	链板高度 plate depth	导向形式 Guide form	片数 Number of plaies	极限拉伸荷载 Ultimate tensile strength	每米长重 Weight per meter
	P	B min	d2 max	L max	h1	h2max		N	Q min	q
	mm	mm	mm	mm	mm	mm			kN/lbf	kg/m
C4-120		19.5		24.5			内 (Inside)	13	20.0	1.20
C4-123		22.5		27.5			内 (Inside)	15	23.0	1.37
C4-129		28.5		33.5			内 (Inside)	19	28.5	1.72
C4-132		31.5		36.5			内 (Inside)	21	31.5	1.89
C4-138		37.5		42.5			内 (Inside)	25	38.0	2.22
C4-150		49.5		54.5			内 (Inside)	33	50.0	2.90
C4-166		65.5		71.5			内 (Inside)	43	65.0	3.78
C4-169		68.5		74.5			内 (Inside)	45	74.0	3.93
C4-178		78.0		84.0			内 (Inside)	51	77.0	4.50
C4-181		81.0		87.0			内 (Inside)	53	80.0	4.70
C4-320		19.5		24.5			外 (Outside)	13	20.0	1.21
C4-323		22.5		27.5			外 (Outside)	15	23.0	1.38
C4-329	12.7	28.5	5.08	33.5	6.62	12.1	外 (Outside)	19	28.5	1.73
C4-332		31.5		36.5			外 (Outside)	21	31.5	1.90
C4-338		37.5		42.5			外 (Outside)	25	39.0	2.23
C4-343		43.0		49.0			外 (Outside)	28	42.5	2.51
C4-345		44.5		50.5			外 (Outside)	29	44.0	2.58
C4-349		49.0		55.0			外 (Outside)	32	48.5	2.84
C4-351		50.0		56.4			外 (Outside)	33	50.0	2.94
C4-355		55.0		61.0			外 (Outside)	26	54.5	3.17
C4-361		61.0		67.0			外 (Outside)	40	60.5	3.53
C4-366		65.5		71.5			外 (Outside)	43	65.0	3.78
C4-369		68.5		74.5			外 (Outside)	45	68.0	3.93
C4-378		78.0		84.0			外 (Outside)	51	77.0	4.50
C4-381		81.0		87.0			外 (Outside)	53	80.0	4.70
C4-3104		103.5		109.5			外 (Outside)	68	102.5	6.00