




O型密封圈摩托车链条 O-ring motorcycle chains

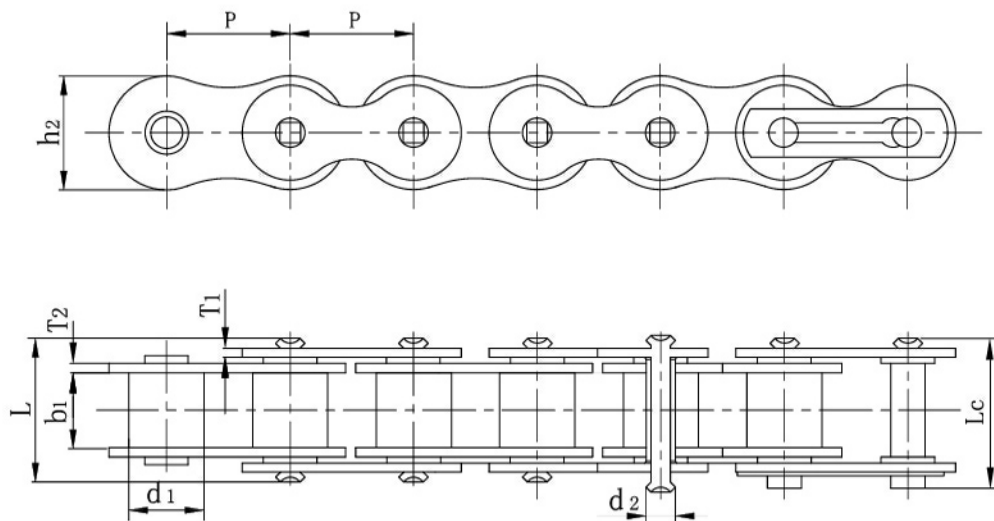

钱江“O”型号密封圈主要适用于水、泥山、尘埃、高速运转等恶劣环境中，所以对产品的性能要求方面是比较苛刻的，使用寿命比常规的链条高3-5倍左右

Qianjiang O-ring chain is mainly suitable for the adverse environments, such as water, mud or dust, So it's more demanding for its performance, and the service life is about 3-5 times than standard chains.

- | | |
|---|---|
| 1. 轴销使用优质合金钢; | 1. Superior quality alloy steel for pins; |
| 2. 轴销为四方铆头(节距 $\geq 15.875\text{mm}$); | 2. Quad-riveted pins (pitch $\geq 15.875\text{mm}$); |
| 3. 无缝套筒为优质合金钢; | 3. Superior quality alloy steel for Solid bushes; |
| 4. 滚子为优质合金钢。 | 4. Superior quality alloy steel for rollers. |

钱江链号 Qianjiang Chain No.	节距 Pitch	滚子直径 Roller diameter	销轴直径 Pin diameter	外链板厚度 Outer Plate thickness	内链板厚度 inner Plate thickness	内节内宽 Width between inner plates	极限拉伸载荷 Ultimate tensile strength	密封 Seal	适用排量 Disp.C.C.
	P	d1 max	d2 max	t1 max	t2 max	b1 min	Q(min)	Type	max
	mm	mm	mm	mm	mm	mm	kN		cc
420V	12.7	7.77	3.96	1.52	1.52	6.25	17.0	0	100
420VM	12.7	7.77	3.96	1.70	1.70	6.25	17.0	0	100
428V	12.7	8.51	4.45	1.62	1.62	7.75	19.0	0	125
428VM	12.7	8.51	4.45	2.02	2.02	7.75	21.0	0	200
520V	15.875	10.22	5.24	2.22	2.22	6.25	34.0	0	250
520VM	15.875	10.22	5.24	2.42	2.42	6.25	36.0	0	250
525V	15.875	10.22	5.24	2.22	2.22	7.94	34.0	0	400
525VM	15.875	10.22	5.24	2.22	2.42	7.94	36.0	0	500
530V	15.875	10.22	5.24	2.22	2.22	9.40	34.0	0	500
530VM	15.875	10.22	5.24	2.42	2.42	9.40	36.0	0	750
630V	19.05	11.91	5.96	2.42	2.42	9.40	38.0	0	1000
630VM	19.05	11.91	5.96	3.22	3.22	9.40	46.0	0	1200