




## O型密封圈摩托车链条 O-ring motorcycle chains

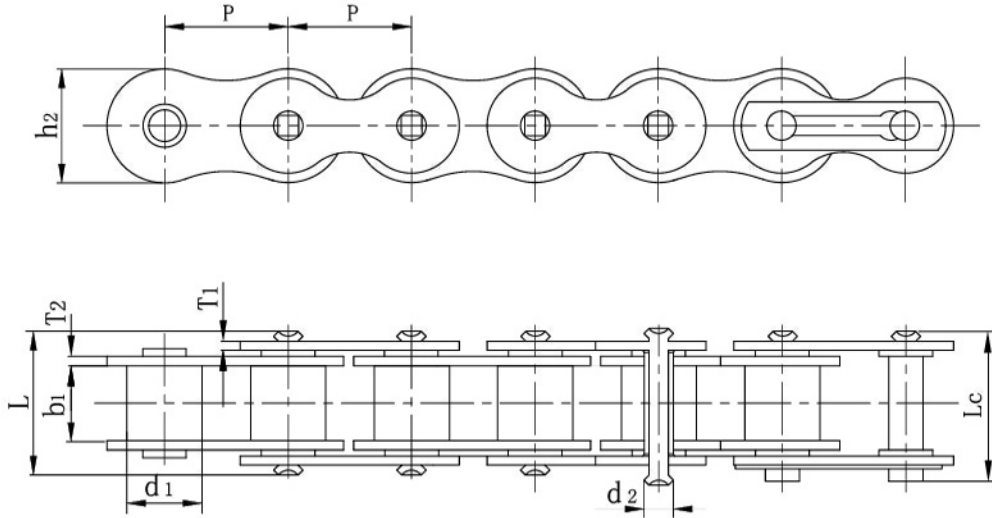

钱江“O”型号密封圈主要适用于水、泥山、尘埃、高速运转等恶劣环境中，所以对产品的性能要求方面是比较苛刻的，使用寿命比常规的链条高3-5倍左右

Qianjiang O-ring chain is mainly suitable for the adverse environments, such as water, mud or dust, so it's more demanding for its performance, and the service life is about 3-5 times than standard chains.

钱江链号 Qianjiang Chain No.	节距	滚子直径	销轴直径	外链板厚度	内链板厚度	内节内宽	极限拉伸载荷	密封	适用排量
	Pith	Roller diameter	Pin diameter	Outer Plate thickness	inner Plate thickness	Width between inner plates	Ultimate tensile strength	Seal	Disp.C.C.
	P	d1 max	d2 max	t1 max	t2 max	b1 min	Q	Type	max
	mm	mm	mm	mm	mm	mm	kN		cc
420V	12.7	7.77	3.96	1.52	1.52	6.25	17.0	0	100
420VM	12.7	7.77	3.96	1.80	1.80	6.25	17.0	0	100
428V	12.7	8.51	4.45	1.62	1.62	7.75	18.0	0	125
428VM	12.7	8.51	4.45	2.02	2.02	7.75	21.0	0	200
520V	15.875	10.22	5.24	2.22	2.22	6.25	34.0	0	250
520VM	15.875	10.22	5.24	2.42	2.42	6.25	36.0	0	250
525V	15.875	10.22	5.24	2.22	2.22	7.94	34.0	0	400
525VM	15.875	10.22	5.24	2.42	2.42	7.94	36.0	0	500
530V	15.875	10.22	5.24	2.22	2.22	9.40	34.0	0	500
530VM	15.875	10.22	5.24	2.42	2.42	9.40	36.0	0	750
630V	19.05	11.91	5.96	2.42	2.42	9.40	38.0	0	1000
630VM	19.05	11.91	5.96	3.22	3.22	9.40	46.0	0	1200