




不锈钢短节距精密滚子链（A系列） Stainless steel short pitch precision roller chain(A series)

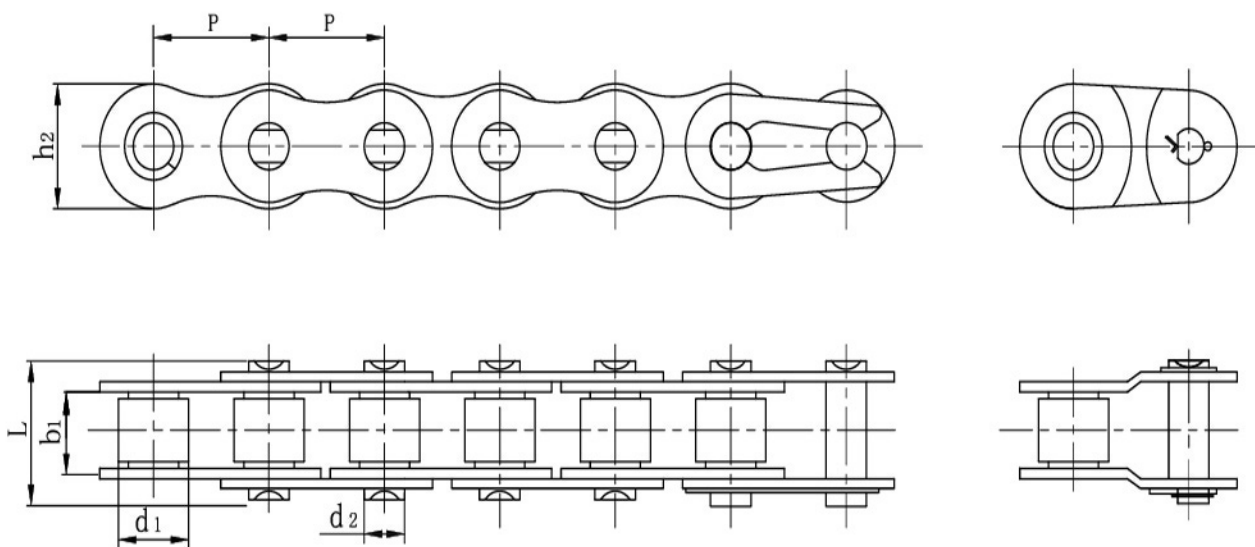

链号 Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴 Pin		内链板高度 inner plate depth	极限拉伸荷载 Ultimate tensile strength	平均拉伸荷载 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	直径 dia	长度 length	h2max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*25SS-1	6.35	3.3	3.18	2.31	7.9	6	2.34	2.52	0.15
*35SS-1	9.525	5.08	4.77	3.58	12	9	5.4	7.5	0.33
41SS-1	12.7	7.77	6.25	3.58	13.7	9.8	4.7	6.8	0.41
40SS-1	12.7	7.95	7.85	3.96	16.6	12	9.8	12	0.62
50SS-1	15.875	10.16	9.4	5.08	20.5	15	16.2	21.3	1.02
60SS-1	19.05	11.91	12.57	5.94	25.3	18	21	25.3	1.5
80SS-1	25.4	15.88	15.75	7.92	32.7	24	36	45.7	2.6
100SS-1	31.75	19.05	18.9	9.53	39.8	30.18	58.9	66.6	3.91
120SS-1	38.1	22.23	25.22	11.1	50.3	35.7	92.8	98.3	5.62


*套筒链：表中滚子直径d1为套筒直径

*Bush chain: d1 in the table indicates the external diameter of the bush



不锈钢短节距精密滚子链(B系列)

Stainless steel short pitch precision roller chain(B series)

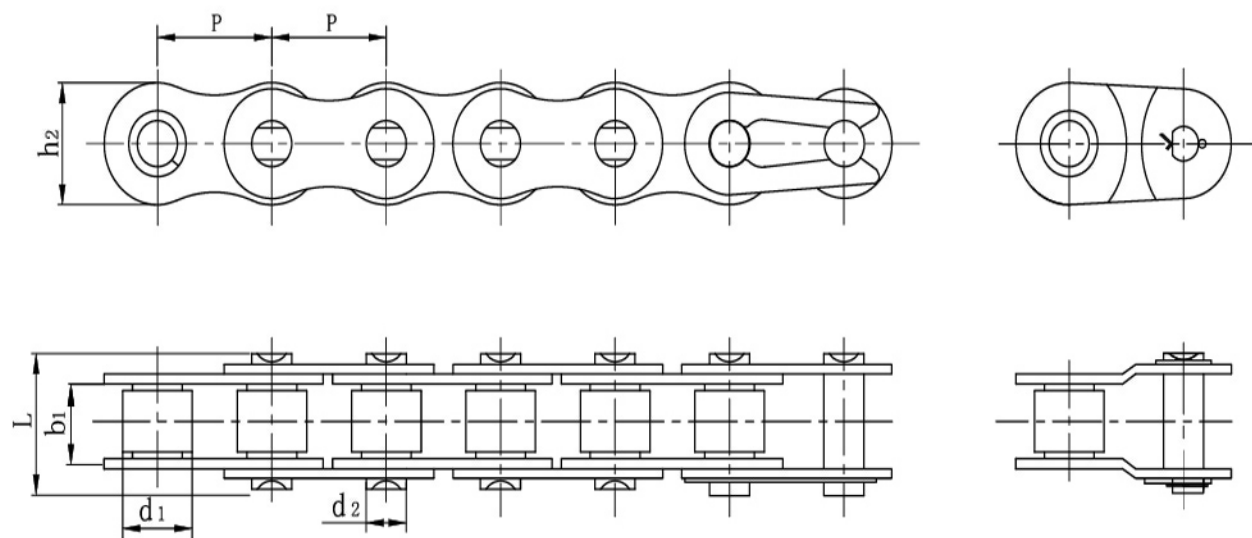

链号 Chain No.	节距	滚子直径	内节内宽	销轴 Pin		内链板高度	极限拉伸荷载	平均拉伸荷载	每米长重
	Pith	Roller diameter	Width between inner plates	直径 dia	长度 length	inner plate depth	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2	L	h2max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
*05BSS-1	8	5	3	2.31	7.8	7	3.33	4.2	0.18
*06BSS-1	9.525	6.35	5.72	3.28	12.54	8.2	4.5	5.7	0.38
08BSS-1	12.7	8.51	7.75	4.45	16.8	11.8	12	12.2	0.74
10BSS-1	15.875	10.16	9.65	5.08	19.2	14.6	14.9	16.2	0.95
12BSS-1	19.05	12.07	11.68	5.72	22	16	17.4	17.7	1.22
16BSS-1	25.4	15.88	17.02	8.28	35.6	21	40.6	46.7	2.77
20BSS-1	31.75	19.05	19.56	10.19	40.4	26	56	64.3	3.68
24BSS-1	38.1	25.4	25.4	14.63	53.4	33.4	96	115.6	7.1

*直板
*Straight side plates