




双节距传动链

Double pitch transmission chains

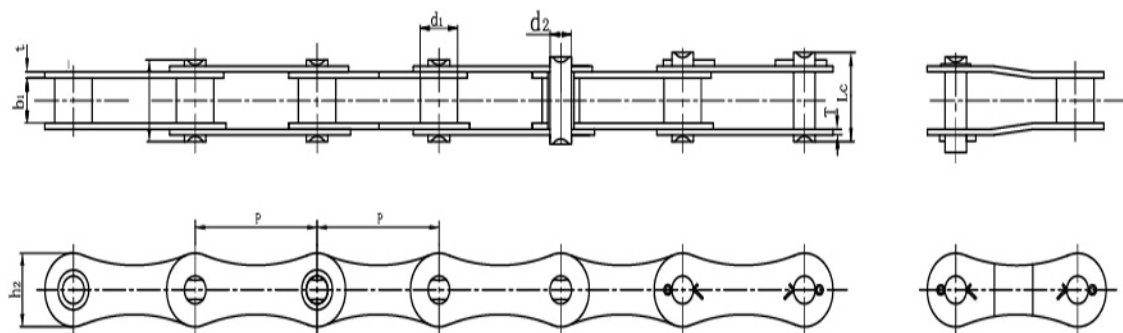

DIN/ISO 链号 DIN/ISO Chain No.	ANSI 链号 ANSI Chain No.	节距	滚子直径	内节内宽 Width between inner plates	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸载荷	平均拉伸载荷	每米净重
		Pith	Roller diameter		Pin diamter	Pin length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight Per meter
		P	d1(max)	b1(min)	d2 max	L max	Lc max	h2(max)	T max	Q(min)	Q0	q
		mm	mm	mm	mm	mm	mm	mm	mm	KN	KN	kg/m
208A	2040	25.40	7.95	7.85	3.96	16.6	17.8	12.0	1.50	14.1/3205	16.7	0.42
208B		25.40	8.51	4.45	4.45	16.7	18.2	11.8	1.60	18.0/4091	19.4	0.45
210A	2050	31.75	10.16	5.08	5.08	20.7	22.2	15.0	2.03	22.2/5045	28.1	0.73
210B		31.75	10.16	5.08	5.08	19.5	20.9	14.7	1.70	22.4/5091	27.5	0.65
212A	2060	38.10	11.91	5.94	5.94	25.9	27.7	18.0	2.42	31.8/7227	36.8	1.02
212B		38.10	12.07	5.72	5.72	22.5	25.2	16.0	1.85	29.0/6591	32.2	0.76
216A	2080	50.80	15.88	7.92	7.92	32.7	36.5	24.0	3.25	56.7/12886	65.7	1.70
216AH	2080H	50.80	15.88	7.92	7.92	36.2	29.4	24.0	4.00	56.7/12886	70.0	2.17
216B		50.80	15.88	8.28	8.28	36.1	39.1	21.0	4.15/3.1	60.0/13636	72.8	1.75
220A	2100	63.50	19.05	9.53	9.53	40.4	44.7	30.0	4.00	88.5/20114	102.6	2.55
220B		63.50	19.05	10.19	10.19	41.3	45.0	26.4	4.5/3.5	95.0/14773	106.7	2.62