




侧弯链 Side bow chains

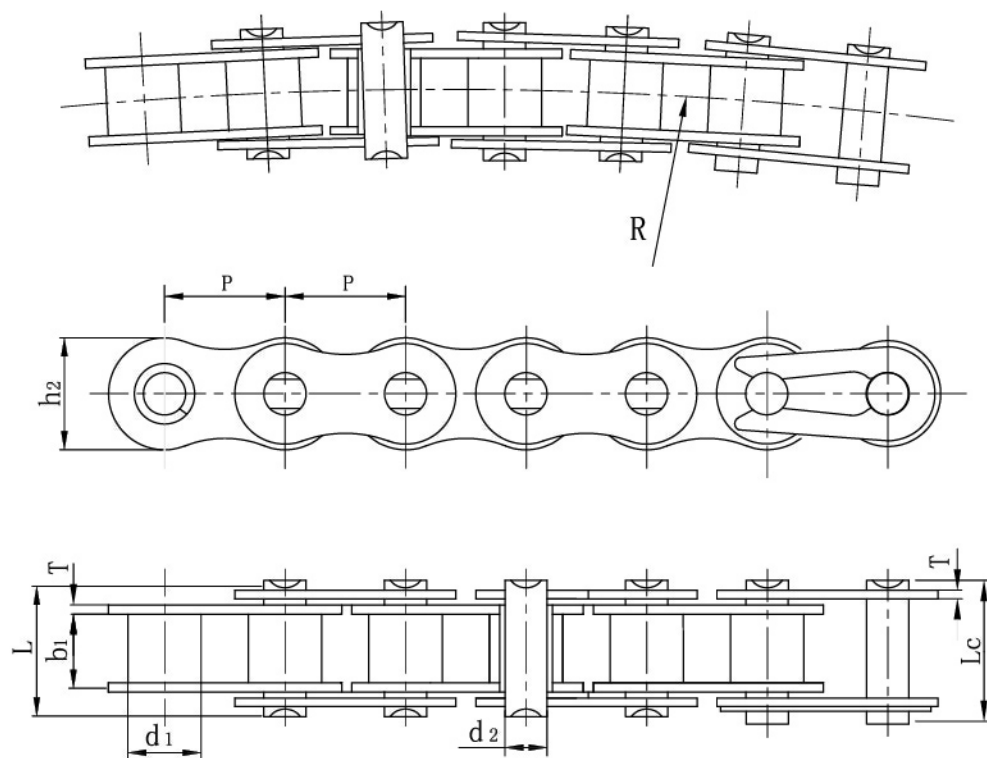

钱江链号 Qianjiang Chain No.	节距 Pitch	滚子直径 Roller diameter	内节内宽 Width between inner plates	销轴直径 Pin diameter	销轴长度 Pin length		内链板高度 inner plate depth	链板厚度 Plate thickness	侧弯链 Side bow chains	极限拉伸荷载 Ultimate tensile strength	平均拉伸荷载 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2max	T max	Pt	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kn/lbf	Kn	kg/m
40SB	12.700	7.95	7.85	3.96	16.9	18.1	11.70	1.50	350	13.8/3136	15.20	0.80
43SB	12.700	7.95	7.85	3.45	18.3	19.5	11.70	1.50	305	12.0/2727	13.20	0.64
50SB	15.875	10.16	9.40	4.37	20.7	22.7	14.90	2.00	400	20.6/4681	22.70	1.09
60SB	19.050	11.91	12.57	5.34	26.6	28.4	18.00	2.40	500	15.7/3568	17.30	1.54
63SB	19.050	11.91	12.68	5.08	28.8	30.6	17.20	2.40/2.00	350	12.5/2840	20.00	1.40
80SB	25.400	15.88	15.75	7.19	34.0	37.3	24.00	3.25	711	40.9/9201	42.00	2.60